

FINALIZED DRAFT

AUTOMOTIVE INDUSTRY STANDARD

**Intelligent Transportation Systems (ITS)
- Requirements for Public Transport
Vehicle Operation**

ARAI

**CHECK LIST FOR PREPARING AUTOMOTIVE INDUSTRY STANDARD
AIS-140: Intelligent Transportation Systems (ITS) - Requirements for Public
Transport Vehicle Operation**

Sl. No.	PARTICULARS	REMARKS
1.	Indicate details of the base reference standard. (e.g. ECE / EEC Directive/GTR etc.)	NA
2.	Add an explanatory note indicating differences between the above standard and the draft, if any.	NA
3.	Specify details of technical specifications to be submitted at the time of type approval relevant to the requirements of this standard covered.	Yes
4.	Are the details of Worst Case Criteria covered?	NA
5.	Are the performance requirements covered?	Yes
6.	Is there a need to specify dimensional requirements?	NA
7.	If yes, are they covered?	
8.	Is there a need to specify COP requirements? If yes, are they covered?	
9.	Is there a need to specify type approval, and routine test separately, as in the case of some of the Indian Standards? If yes, are they covered?	NA
10.	If the standard is for a part/component or Sub-system; i) AIS-037 or ISI marking scheme be implemented for this part? ii) Are there any requirements to be covered for this part when fitted on the vehicle? If yes, has a separate standard been prepared?	NA
11.	If the standard is intended for replacing or revising an already notified standard, are transitory provisions for re-certification of already certified parts/vehicles by comparing the previous test result, certain additional test, etc. required? If yes, are they included?	NA
12.	Include details of any other international or foreign national standards which could be considered as alternate standard.	NA
13.	Are the details of accuracy and least counts of test equipment/meters required to be specified? If yes, have they been included?	Yes
14.	What are the test equipment's for establishing compliance?	NA
15.	If possible, identify such facilities available in India.	ARAI, iCAT
16.	Are there any points on which special comments or information is to be invited from members? If yes, are they identified?	NA
17.	Does the scope of standard clearly identify vehicle categories?	Yes

Sl. No.	PARTICULARS	REMARKS
18.	Has the clarity of definitions been examined?	Yes

Status chart of the Standard to be used by the purchaser for updating the record

Sl. No.	Corrigenda	Amendment	Revision	Date	Remark	Misc.

General remarks:

INTRODUCTION

The Government of India felt the need for a permanent agency to expedite the publication of standards and development of test facilities in parallel when the work on the preparation of the standards is going on, as the development of improved safety critical parts can be undertaken only after the publication of the standard and commissioning of test facilities. To this end, the erstwhile Ministry of Surface Transport (MoST) has constituted a permanent Automotive Industry Standards Committee (AISC) vide order No. RT-11028/11/97-MVL dated September 15, 1997. The standards prepared by AISC will be approved by the permanent CMVR Technical Standing Committee (CTSC). After approval, the Automotive Research Association of India (ARAI), Pune, being the secretariat of the AIS Committee, will publish this standard.

Intelligent Transport Systems (ITS) are globally proven systems to optimize the utilization of existing transport infrastructure and improve transportation systems in terms of efficiency, quality, comfort and safety. Having realized the potential of ITS, Government bodies and other organizations in India are presently working towards implementing various components of ITS across the country.

The first step taken for creation and implementation of ITS was holding a National Workshop titled “User Requirements for Interactive ITS Architecture”, which was conducted as a collaboration between SIAM and ASRTU on 26th & 27th February 2015. This was primarily focused on ITS in Public Bus Transportation. Nonetheless, the workshop helped to create the outline for “National Intelligent Transport System Architecture and Policy for Public Transport (Bus)”, which was submitted by ASRTU and SIAM to the government

In the 44th & 45th CMVR-TSC, Chairman had directed - standardization activities to be initiated on Intelligent Transportation Systems (ITS) - Vehicle Location Tracking, Camera Surveillance System and Emergency Request Button. The committee intended to extend the above user requirements to all public transportation namely – buses, taxis, etc. The current document covers the requirements for Vehicle Location Tracking and Emergency Button. The other ITS components like PIS, CCTV system, Fare collection etc. are deliberated and would be addressed in later phase and could be added as separate parts to the current document..

Based on these directions, the AISC Panel on ITS has prepared this AIS-140 titled, “Intelligent Transportation Systems (ITS) - Requirements for Public Transport Vehicle Operation”

The panel has also deliberated and identified the necessary elements for an effective implementation of vehicle level ITS system.

This standard has been prepared by considering inputs received from all stake holders on ITS, mainly -

- a. Directions of CMVR-TSC
- b. Detailed Specification Document on Vehicle Tracking Devices (dated 4th March 2015, published by MoRTH)
- c. Report of Department of Telecom (Telecom Engineering Centre) Automotive Working Group on M2M enablement in Intelligent Transport System (ITS)

This AIS on ITS, has been provisioned for device level approval; including construction and target vehicle level approval. Device level approval is needed to enable retro-fitment of ITS systems on in-use vehicles. This will ensure ITS Backend Control Centre infrastructure already presents with the STUs can be more fully utilized and make the investment in the Backend Control Centre infrastructure more viable.

As per the direction of CMVR-TSC which needed the Communication Protocol and Backend Control Centre requirement for tracking and handling the alerts to be detailed, the same has been addressed in Section 6 & 7, as detailed below.

- The devices would transmit data to the Backend Control Centre using 2G/3G/4G wireless connectivity (with SMS fall back) as per the protocol provided in respective sections (Section 6).
- The data from the devices would travel over the wireless telecom service provider network and finally get delivered at the Backend Control Centre. The detail about Device to Backend Communication Mechanism is mentioned in Section 7.

BIS and AIS both have panels which are formulating standards on ITS. It is our belief that taking the AIS route for the 1st implementation would give the faster time for adoption. Experts in the BIS panel and in DIMTS who are working on these subjects have been co-opted and invited to work in the AIS panel to make the AIS as robust as possible. Once implemented and all implementation problems in this emerging technology have been eliminated, BIS standard can be made with further inclusions if any resulting from consultations with the wider stakeholder community. Because of these reasons, we recommend the AIS route for regulation creation and first implementation.

One of the major concerns which has been raised during the panel meetings is on the issue of privacy encroachments by ITS systems. Some overseas member countries of the 1958 agreement have been continuously emphasizing in WP29 forums that the regulated ITS system must not encroach on privacy. Towards this, the panel has submitted a document titled 'Data Privacy in Transportation ITS' To help the system developers deal with these issues. Further, system developer can also take guidance from 'IS/ISO/TR 12859: 2009 - Intelligent Transport Systems — System Architecture — Privacy Aspects in ITS Standards and Systems' while developing their systems to meet the requirements of this standard. The Panel and the Automotive Industry Standards Committee (AISC) responsible for preparation of this standard are given in Annexure-D and Annexure -E respectively.

CONTENTS		
Clause No.	Details	Page No.
1.0	Scope	1/40
2.0	Application For CMVR Type Approval	3/40
3.0	ITS Functions and Requirements	4/40
4.0	Communication Protocol	10/40
5.0	Construction and Installation	16/40
6.0	Functional, Performance, Durability, Environmental and Protocol Tests	17/40
7.0	Device to Backend Communication Mechanism	31/40
List of Annexures		
ANNEXURE-A	Information to be Submitted for Type Approval	34/40
ANNEXURE-B	Criteria for Extension of Type Approval	35/40
ANNEXURE-C	Physical Interfaces (Connectors) for Power and I/Os	36/40
ANNEXURE-D	Composition of Panel	38/40
ANNEXURE-E	Committee Composition	40/40

Intelligent Transportation Systems (ITS) - Requirements for Public Transport Vehicle Operation

1.0 SCOPE

1.A.0 This standard applies to both individual components as well as system environment intended to be used in Public transport vehicles.

1.A.1 INTELLIGENT TRANSPORTATION SYSTEMS-VLT WITH AN EMERGENCY SYSTEM

Requirements on ITS devices and functions - Vehicle Location Tracking and Emergency Button

1.B.0 DEFINITIONS:

For the purpose of this standard, definitions are given below:

1.B.1 **“Acquisition sensitivity”** refers to the minimum signal level at which the device is able to successfully perform a cold start TTFF. The acquisition sensitivity test is a simulated signal test.

1.B.2 **“Assisted GPS (A-GPS)”** is a system allowing satellite receivers to obtain information from communication network resources to assist in acquiring satellite location. A-GPS system is especially useful when the receiver is in a location where it is difficult for the satellite signals to penetrate. In addition to providing better coverage, A-GPS also improves the start-up time, which is the time required by the satellites and the receivers to establish a reliable connection.

1.B.3 **“Circular Error Probability (CEP)”** is defined as the radius of a circle centered on the true value that contains 50% of the actual GPS measurements. So a receiver with 5 meter CEP accuracy will be within 5 meter of the true measurement 50% of the time. The other 50% of the time the measurement will be in error by more than one meter.

1.B.4 **“Dilution of Precision (DOP)”** is the degree of proximity of the location data to their mean value. The relative position of satellites affects the accuracy of location calculation by the locating module. Location coordinates computed when the satellites are clustered together suffer from dilution of precision (DOP), a factor that multiplies the associated errors. The DOP for an ideal satellites constellation arrangement equals close to 1, which does not magnify the underlying errors.

1.B.5 **“Distance Root Mean Square (DRMS also called RMS, 1Sigma)”**

This is computed as square root of the average of the squared horizontal position errors with 65% probability. The position expressed has the probability of being within a circle with radius with 65% probability. A locating module with 6 metre DRMS accuracy would be within 6 meters of its actual position 65% of the time.

- 1.B.6 **“Emergency Button”**A button provided in vehicle for passengers or crew members to send specialized data packet /SMS to Centralized regulatory server to indicate safety/panic situation caused by human or natural disaster or vehicle accident etc.
- 1.B.7 **“Global Positioning System (GPS)”** is a space-based radio navigation system. It provides positioning, navigation, and timing services to military and civilian users on a continuous basis.
- 1.B.8 **“Sensitivity”** refers to the minimum signal strength level at which locating module can successfully perform a location fix. A GNSS locating module has two different sensitivity levels – acquisition sensitivity and tracking sensitivity.
- 1.B.9 **“Time to First Fix (TTFF)”** describes the time required for a tracking device to acquire adequate satellite signals and related data (almanac and ephemeris data) to compute location.
- 1.B.10 **“Tracking Sensitivity”** refers to the minimum signal level at which the device is able to successfully maintain the location fix. The acquisition sensitivity test is a simulated signal test.
- 1.B.11 **“Vehicle Location Tracking (VLT)”**device uses satellite based location technology to determine and record the precise location of a vehicle at regular intervals. The location data so determined can be stored within the device, and/or can be transmitted to the Backend Control Centre using a wireless communication modem built in the device.

1.C REFERENCES:

The References are listed below.

- 1.C.1 National Level Vehicle Security and Tracking System – Detailed Specification Document on Vehicle Tracking Devices (GPS) (Published by MoRTH MoRTH).
- 1.C.2 APTA TCIP - American Public Transportation Association (APTA) Standard for Transit Communications Interface Profiles (TCIP)
- 1.C.3 EBSF - European Bus System of the Future
- 1.C.4 ISO 11898-1:2003 Road vehicles — Controller area network (CAN)
- 1.C.5 SAE J 1939 Recommended Practice for a Serial Control and Communications Vehicle Network.
- 1.C.6 Bus-FMS-Standard
- 1.C.7 SAE USCAR 18 / USCAR18-3 - FAKRA SMB RF CONNECTOR SUPPLEMENT
- 1.C.8 National ITS Architecture - U.S. Department of Transportation
- 1.C.9 ISO 17185-1:2014 - Intelligent transport systems — Public transport user information — Part 1: Standards framework for public information

systems

- 1.C.10 Trans model Standard (CEN/TC 278 WG3/SG4, Reference Entity-Relationship Data Model for Public Transport) - European reference data model for Public Transport operations developed within several European Projects - EN 12896:2006
- 1.C.11 Specification for Entity-Relationship for describing the main fixed objects in Public transport CEN/TC 278, 2008 - EN 28701:2012
- 1.C.12 RTIG (Real Time Information Group Ltd) - Digital Air Interface Protocol
- 1.C.13 SIRI (Service Interface for Real Time Information) European Technical Specification (TS) - CEN/TS 15531
- 1.C.14 NeTEx-Network Exchange European Technical Specification (TS) CEN/TS 16614
- 1.C.15 NaPTAN (National Public Transport Access Node)
- 1.C.16 ISO 15638-15:2014 Intelligent transport systems – Framework for cooperative telematics applications for regulated vehicles (TARV) – Part 15: Vehicle location monitoring
- 1.C.17 ISO 15638-5:2013 Intelligent transport systems – Framework for collaborative Telematics Applications for Regulated commercial freight Vehicles (TARV) – Part 5: Generic vehicle information
- 1.C.18 NMEA-0183: The NMEA 0183 standard defines an electrical interface and data protocol for communications between marine instrumentation.
- 1.C.19 IS/ISO/TR 12859:2009 – Intelligent Transport System-System Architecture-Privacy Aspects in ITS standards and systems
- 1.C.20 Report of Department of Telecom (Telecom Engineering Centre) Automotive Working Group on M2M enablement in Intelligent Transport System (ITS)
- 1.C.21 URL: <http://tec.gov.in/pdf/M2M/M2M%20Enablement%20in%20ITS.pdf>

2.0 APPLICATION FOR CMVR TYPE APPROVAL

- 2.1 The application for CMVR device level approval shall be accompanied by information on the system specification as mentioned in Annexure A.
- 2.2 Type approval shall involve following steps:
 - 2.2.1 **Device Approval:** Approval provided at Device level for compliance to this standard.

These approved devices can be fitted / retro-fitted by manufacturer/ Dealer/ permit holder/system integrator in any vehicle model provided it shall meet installation requirements as mentioned in Clause No. 5 of this standard. For manufacturers seeking vehicle level approval with approved VLT with

Emergency Buttons fitted shall only require installation approval as per the provisions of Clause 5 and Sub-Clause 6.1 of Clause 6.

2.3 Modifications and Extension of Approval

2.3.1 Every modification pertaining to the information, even if the changes are not technical in nature declared in accordance with clause 2.1, shall be intimated by the VLT with Emergency Button Manufacturer / to the test agency.

2.3.1.1 If the changes are in parameters not related to the provisions, no further action need be taken.

2.3.1.2 If the changes are in parameters related to the provisions, the test agency, which has issued the certificate of compliance, may then consider, based on the justification provided by the VLT with Emergency Button Manufacturer and reviewed by the test agency, whether,

The model with the changed specifications still complies with provisions;

Or,

Any further verification is required to establish compliance.

2.3.2 In case of 2.3.1.2, tests for only those parameters which are affected by the modifications need be carried out based on Criteria for extension of type approval as per Annexure B.

2.3.3 In case of fulfilment of criterion of clause 2.3.1.1 or after results of further verification as per clause 2.3.1.2 are satisfactory, the approval of compliance shall be extended for the changes carried out.

3.0 ITS FUNCTIONS AND REQUIREMENTS

The list of ITS functions envisaged from this device type is set out below in Table 3A –

Function	Sub Functions
Safety and Security	Emergency Buttons
	Vehicle Location Tracking (VLT)

The above functions and their requirements shall be met by only single device that can be interfaced by external emergency buttons. The communications to Backend Control Server (Government authorized server) shall be done by device as per the protocol and functionalities defined below.

3.1 Vehicle Location Tracking (VLT) With Emergency Button

3.1.1 Functional Requirements for VLT

- 3.1.1.1 Device shall be capable of obtaining position information using Global Navigation Satellite System (GNSS). GNSS receiver specifications are as follows:
- a. Device shall be capable for operating in L and/or S band and include support for NAVIC/IRNSS (Indian Regional Navigation Satellite System) for devices installed on or after 1st April, 2018.
 - b. The Device shall support GAGAN, the Indian SBAS (Satellite Based Augmentation System)
 - c. Device shall have a position accuracy of minimum 2.5 m CEP or 6 m 2DRMS
 - d. Device shall have an acquisition sensitivity of minimum (-) 148 dBm
 - e. Device shall have an tracking sensitivity of minimum (-) 165 dBm
 - f. Device shall have an internal antenna; however if in case of Integrated systems with vehicle / aftermarket OEM approved kits if the fitment location prevents the internal antenna from functioning, then external antenna shall be provided.
- 3.1.1.2 Device shall support standard minimum I/Os as mentioned: 4 Digital, 2 Analogue and 1 Serial Communication (e.g. RS232) for interfacing external systems (E.g. Digital input for Emergency request button interfacing).
- 3.1.1.3 Device shall be capable of transmitting data to Backend Control Server (Government authorized server) via Wide Area (Mobile) Communications network (GSM/GPRS) as per Communication Protocol in Section 4.
- 3.1.1.4 Device shall be capable of transmitting Position, Velocity and Time (PVT data) along with heading (direction of travel) to a Backend Control Server (Government authorized server) at configurable frequency as per Communication Protocol of Section 4.
- The fixed frequency shall be user configurable, minimum frequency shall be 5 sec during vehicle operation and not less than 10 minutes in sleep/IGN OFF) as per the protocol defined in Communication Protocol of Section 4.
- 3.1.1.5 Device shall be capable of transmitting data to minimum 2 different IP addresses (1 IP address for regulatory purpose (PVT data) and 1 IP address for Emergency response system other than the IP's required for Operational purpose.
- 3.1.1.6 On pressing of Emergency button, the system implementing VLT function shall send emergency Alert (Alert ID 10 as mentioned in Sub-section 4.2.1 of Communication Protocol Section 4) to the configured IP address(s) as per the Communication Protocol mentioned in Section 4. In the absence of GPRS network, the emergency alert shall be sent as SMS message along with vehicle location data to configured control center number(s). The SMS shall consist parameters as given in Sub-section 4.2.2.

- 3.1.1.7 Device shall have an internal back-up battery to support 4 hours of normal operations (to be tested for positional record transmission at a frequency of 60 sec)
- 3.1.1.8 Device shall be capable of transmitting alerts to the Backend Control Server (Government authorized server) directly. The applicable list of alerts is given in Section 4.2 (Alert ID 3 to 12) of Section 4.
- 3.1.1.9 Device shall support over the air software and configuration update.
- 3.1.1.10 Device shall support basic standard configuration (Mobile communications network settings, Backend Control Server (Government authorized server) details, data frequencies, alert thresholds etc.) as per configuration specification defined in Section 4.
- 3.1.1.11 Device shall support store and forward mechanism for all type of data (periodic data and alerts) meant for backend transmission. The system shall store data in internal memory during communication network unavailability and transmit the data when the connection resumes in last in first out (LIFO) manner. The live data shall be given higher priority for transmission than back log (stored data) at any point in time.
- 3.1.1.12 The Device shall have a unique identifier for identifying the VLT device and data. The unique ID shall be stored in a read only memory area so that it cannot be altered or overwritten by any person. The unique identifier may be Vehicle Identification number or IMEI (International Mobile Station Equipment Identity) Number.
- 3.1.1.13 Device shall store/write the registration number of the vehicle in the internal nonvolatile memory.
- 3.1.1.14 Device shall have an Embedded SIM.
- 3.1.1.15 Device shall be designed to operate between 8VDC and 32VDC using vehicle battery input voltage range 12 /24Volts.
- 3.1.1.16 Device shall have a sleep mode current ≤ 20 mA (If the function is implemented in a dedicated system/device).
- 3.1.1.17 Device shall support any operational GNSS system with 12 (minimum) acquisition channels.
- 3.1.1.18 The Device shall support:
- Location on GPRS/SMS
 - Non-volatile memory to store min 40,000 positional log
 - Configurable backup SMS facility in case of GPRS failure
 - Capability to send serving and adjacent cell ID as well as network measurement report (NMR)

- 3.1.1.19 The Device GNSS module shall have:
- The capability of Hot start <5s
 - The capability of Warm start : < 30s
 - The capability of Cold start < 40 s
- 3.1.1.20 Device shall support Outputs as per NMEA 0183
- 3.1.1.21 The Device GPRS module shall have:
- Multi slot GPRS with In - built Quad-band GPRS module/Modem
 - GPRS class 10 or above
 - Support Embedded SIM to cater to the automotive operational requirement such as vibration, temperature and humidity and provide long life span with at least 10 years life and more than 1 million read/write cycles
 - GPRS module & SIM shall support
 - SMS, Data (GPRS, TCP/IP) and
 - Support multiple network OTA switching (on-demand/automatic) capabilities.
- 3.1.1.22 Device shall be dust, temperature, vibration, water splash resistant, IP 65 rated or better, tamper proof as per Section 6.
- 3.1.1.23 Device shall be manufactured using processes as per quality management standard for automotive industries i.e. ISO/TS 16949 updated from time to time
- 3.1.1.24 Device shall support A-GPS (Assisted GPS)
- 3.1.1.25 Device shall have provision of secured data transmission to the Backend Control Centre from the devices through secured channel (e.g. secured dedicated APN).
- 3.1.1.26 Device shall have 3 axis accelerometer and 3 axis gyroscope for getting the alerts on harsh breaking harsh acceleration, and rash turning.
- 3.1.2 **Functional Requirement for Emergency System**
- 3.1.2.1 Passengers or in-vehicle crew present in the vehicle shall be able to make an emergency request by pressing the emergency button provided
- 3.1.2.2 The emergency request function shall not exist as standalone. The function shall be part of Vehicle Location Tracking (VLT) system. An alert shall be sent to the Backend Control Server (Government authorized server) when emergency request is raised. De-activation shall always be from authorized government server who receives alert message i.e. NERS system as mentioned in Sub-section 4.2.2.

- 3.1.2.3 The Emergency Buttons will be 'Normally Closed' (NC) type. The form factor of Emergency Buttons will be such that the button is easy to press in the case of an emergency, and simultaneously also minimizes the possibility of accidental or unintended press thereby causing a false alert.
- 3.1.2.4 On pressing of Emergency button, the system implementing VLT function shall send emergency Alert (Alert ID 10 as mentioned in Sub-section 4.2.1 of Communication Protocol Section 4) to the Backend Control Server (Government authorized server) as per the Communication Protocol mentioned in Section 4. In the absence of GPRS network, the alert shall be sent as SMS message along with vehicle location data to configured control center number. The SMS shall consist of parameters as given in Sub-section 4.2.2.
- 3.1.2.5 In absence of both GPRS and GSM networks and on pressing of Emergency Button, the system implementing VLT function shall store the emergency Alert (Alert ID 10 as mentioned in Sub-section 4.2.1 of Communication Protocol Section 4). Once the GPRS or GSM is available, this alert information shall be sent on high priority to the configured IP addresses as per the communication protocol mentioned in Section 4 or as SMS message along with vehicle location data to configured control center number. The SMS shall consist of parameters as given in Sub-section 4.2.2.

3.1.3 **Configuration of Device Parameters Over the Air (OTA)**

The device shall support at least the below parameters to be configurable over the air (through SMS and GPRS). The updation shall be allowed only over an 'authenticated' channel:

1. Setting/ Change of the Primary or Secondary IP and port number
2. Setting/ Change of the APN
3. Set configuration parameter like sleep time, overspeed limit, harsh braking, harsh acceleration, rash turning threshold limits etc.
4. Emergency control SMS Centre Number(s)
5. Configuring the vehicle registration number
6. Configuring the frequency of data transmission in normal / Ignition state / OFF state sleep mode/ Emergency state, etc.
7. Configuring the time duration for Emergency state
8. Capability to reset the device
9. Command to get the IMEI of the device

Configurable commands must involve the following features:

- SET: For setting the parameters.
- GET: For enquiring regarding the parameters such as mobile number, GSM strength, vehicle number and other important parameters.
- CLR: For clearing certain commands, alarms, alerts etc.

After each SET, GET, CLR command the device should send alert to

Backend Control Centre, as mentioned in Section 4 Alert 12, giving the details of Mode, mobile no/ IP of control center sending commands.

3.1.4 Tracking Device Health Monitoring Parameters

The device shall send status of health parameters at configurable interval and this threshold value shall also be configurable over the air. It shall be possible for health parameters to be fetched on demand via command as set out below in Table 3B.

Sl. No.	Field	Description
1	Start Character	\$
2	Header	The header of the packet/ identifier
3	Vendor ID	Vendor identification header
4	Firmware Version	Version details of the Firmware used in EX.1.0.0
5	IMEI	Identified of the sending unit. 15 digit standard unique IMEI no.
6	Battery percentage	Indicates the internal battery charge percentage
7	Low battery threshold value	Indicates value on which low battery alert generated in percentage
8	Memory percentage	Indicates flash memory percentage used
9	Data update rate when ignition ON	Indicates Packet frequency on ignition ON
10	Data update rate when ignition OFF	Indicates Packet frequency on ignition OFF
11	Digital I/o status	Inputs connected to the device.
12	Analog I/o status	Analog input status
13	End character	*

3.1.5 SMS Fall Back

In case of emergency state, (i.e. on pressing of Alert button), the device will shift to the SMS mode in case GPRS connectivity is not available. In such case, the device will send the Alert message and tracking data through SMS mode. Since SMS has the limitation of sending only 160 characters, so the tracking data to be sent in one SMS will have fields - IMEI, Latitude, Direction, Longitude, Direction, location fix, speed, Cell ID, LAC (Location Area Code), Date and Time as per emergency alert . The details is provided in Sub-section 4.2.2.

4.0 COMMUNICATION PROTOCOL

4.1 Data Frame Format

Table below (Table 4A) contains the listing of fields that the vehicle tracking devices would be required to send to the Backend Control Centre. The first 3 fields (Start character, Header for VLT with Emergency Buttons and Vendor ID, who has supplied the device) must be fixed in position as well as format (Header part of frame). Rest all other fields are required to be present in the location data sent by the devices to the backend, but can be in any sequence or with any separator between fields. The data value can be either in American Standard Code for Information Interchange (ASCII) or in HEX format. Device must transmit the Login message whenever it establishes (re-establishes after disconnection) its connectivity with Server with the specified fields. Login Message will carry following information:

- \$DeviceName – Vehicle number on which the device is installed
- \$IMEI – 15 Digit IMEI number
- \$Firmware – Version of the firmware used in the hardware
- \$Protocol -Version of the frame format protocol.
- \$LastValidLocation – Last location info saved at the device.

Field	Description	Sample Data
Start Character	\$	\$
Header	The header of the packet/ identifier	
Vendor ID	Vendor identification header	
Firmware Version	Version details of the Firmware used in EX.1.0.0	1.0.0
Packet Type	Specify the packet type NR = Normal EA = Emergency Alert TA = Tamper Alert (Optional) HP = Health Packet IN = Ignition On IF = Ignition Off BD = Vehicle Battery Disconnect BR = Vehicle Battery	Depending upon the context, every frame from tracking device must carry a qualification code. This helps to determine the state in which vehicle is at that time.

	Reconnect BL = Internal Battery Low	
Packet Status	L=Live or H= History	L
IMEI	Identified of the sending unit. 15 digit standard unique IMEI no.	123456789012345
Vehicle Reg. No	Mapped vehicle registration number	DL1PC9821
GPS Fix	1 = GPS fix OR 0 = GPS invalid	1
Date	Date value as per GPS date time per GPS date time (DDMMYYYY)	220714
Time	Time value as per GPS date time in UTC format (hhmmss)	050656
Latitude	Latitude value in decimal degrees (not less than 6 places)	28.758963
Latitude Dir	Latitude Direction. Example N=North, S= South	N
Longitude	Longitude value in decimal degrees (not less than 6 places).	77.6277844
Longitude Dir	Longitude Direction. E=East, W= West	W
Speed	Speed of Vehicle as Calculated by GPS module in VLT. (in km/hrs.) (Upto One Decimal Value)	25.1
Heading	Course over ground in degrees	310.56
No of Satellites	Number of satellites available for fix	8
Altitude	Altitude of the device in meters	183.5
PDOP	Positional dilution of precision	
HDOP	Horizontal dilution of precision	

Network Operator Name	Name of Network Operator	INA Airtel
Ignition	1= Ignition On , 0 = Ignition Off	1
Main Power Status	0 = Vehicle Battery disconnected 1= Vehicle Battery reconnected	1
Main Input Voltage	Indicator showing source voltage in Volts.(Upto One Decimal Value)	12.5
Internal Battery Voltage	Indicator for level of battery charge remaining. (Upto One Decimal Value)	4.2
Emergency Status	1= On , 0 = Off	0
Tamper Alert (Optional)	C = Cover Closed, O = Cover Open	C
GSM Signal Strength	Value Ranging from 0 – 31	25
MCC	Mobile Country Code	404
MNC	Mobile Network Code	10
LAC	Location Area Code	00D6
Cell ID	GSM Cell ID	CFBD
NMR (Network Measurement Report) Neighbouring Cell ID	Neighbouring 4 cell ID along with their LAC & signal strength	
Digital Input Status	4 external digital input status (Status of Input 1 to Input 3 (0=Off; 1=On))	0001
Digital Output Status	2 external digital output status (0=Off; 1=On)	01
Frame Number	Sequence Number of the messages (000001 to 999999)	000005
Checksum	Insures No error in transmission (optimal)	16

End Character	Indicated End of the frame	*
---------------	----------------------------	---


4.2 Messages & Alerts from Devices

4.2.1 Table below (Table 4B) contains the listing of alerts that need to come from the tracking devices. These alerts are applicable for both live packets as well as the history packets.

Table 4B: Messages & Alerts Supported		
Alert ID	Message & Alerts	Remarks
1.	Location Update	Default message coming from each device
2.	Location Update (history)	Would be sent, if GPRS is not available at the time of sending the message in protocol format Zero, BLANK, NIL, etc.
3.	Alert – Disconnect from main battery	If device is disconnected from vehicle battery and running on its internal battery
4.	Alert – Low battery	If device internal battery has fallen below a defined threshold
5.	Alert – Low battery removed	Indicates that device internal battery is charged again
6.	Alert – Connect back to main battery	Indicates that device is connected back to main battery
7.	Alert – Ignition ON	Indicates that Vehicle's Ignition is switched ON
8.	Alert – Ignition OFF	Indicates that Vehicle's Ignition is switched OFF
9.	Alert – GPS box opened (Optional)	Optional message would be generated indicating GPS box opened
10.	Alert – Emergency state ON*	When any of the emergency button is pressed
11.	Alert – emergency State OFF	When emergency state of vehicle is removed
12.	Alert Over the air parameter change	When any parameter is changed over the air. Shall include the name of parameter changed and source of command

13.	Harsh Braking	Alert indicating for harsh braking.
14.	Harsh Acceleration	Alert indicating for harsh acceleration.
15.	Rash Turning	Alert indicating for Rash turning.
16	Device Tempered	Alert Indicating Emergency button wire disconnect/ wire cut etc.

4.2.2 In case of emergency alert, the alert message shall be sent to 2 different IP addresses hence the device shall support minimum 2 IP addresses (1 IP address for regulatory purpose (PVT data) and 1 IP address for Emergency response system other than the IP’s required for Operational purpose. The PVT data will send the emergency alert to the system. Primary alert will go to the emergency response Backend Control Centre (NERS/ MHA) as may be notified by the Government of India in the schema below:

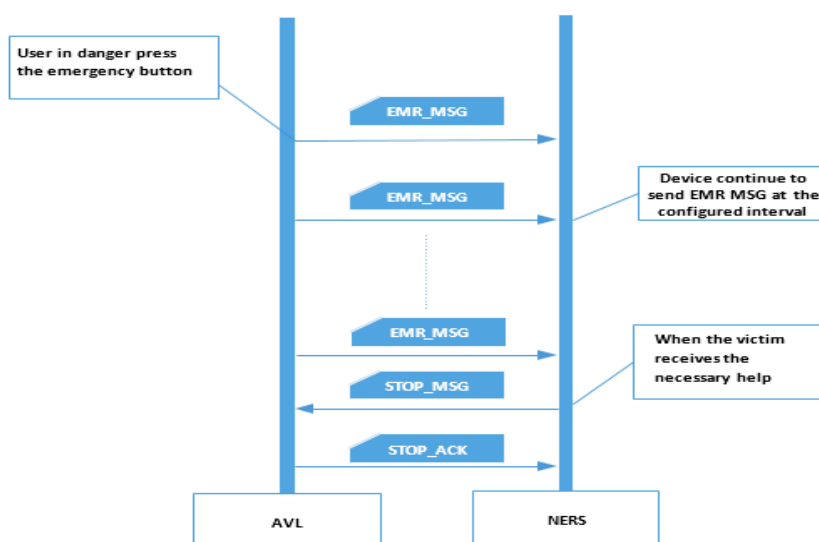

Primary alert will go to the emergency response Backend Control Centre as notified by the Government of India in the indicative format below (Table 4C):

Attribute	Value / Description	Size
Packet Header	EPB, The unique identifier for all messages from VLT	Character, 3 bytes
Packet Header	EPB, The unique identifier for all messages from VLT	Character, 3 bytes
Message Type	Message Types supported. Emergency Message (EMR) or Stop Message (SEM)	Character, 2 bytes

Vehicle ID	Unique ID of the Vehicle (IMEI Number)	Character,15 bytes
Packet Type	NM – Normal Packet, SP – Stored Packet	Character, 2 bytes
Date	Date and time of location the location obtained from the data in DDMMYYYY hhmss format	Character,14 bytes
GPS Validity	A – Valid, V – Invalid	Character, 1 byte
Latitude	Latitude in decimal degrees - dd.mmmmmm format	Double, 12 bytes
Latitude Direction	N – North, S – South	Character, 1 byte
Longitude	Longitude in decimal degrees - dd.mmmmmm format	Double, 12 bytes
Longitude Direction	E – East W – West	Character, 1 byte
Altitude	Altitude in meters (above sea level)	Double, 12 bytes
Speed	Speed of Vehicle as Calculated by GPS module in VLT. (in km/hr)	Float, 6 bytes
Distance	Distance calculated from previous GPS data	Float, 6 bytes
Provider	G - Fine GPS N - Coarse GPS or data from the network	Character, 1 byte
Vehicle RegnNo	Registration Number of the Vehicle	Character, 16 bytes
Reply Number	The mobile number to which Test response needs to be sent. (Emergency Mobile No. as specified by MHA/MoRTH/States.)	0
CRC	The 32 bit checksum of all the characters from the header up to the CRC field	8 bytes

*Above format is indicative only. These Format will be notified by the Government of India time to time.

4.3 **Testing of Configuration of Device Parameters Over the Air (OTA)**

The following testing will be done for

1. Setting/ Change of the Primary or Secondary IP and port number
2. Setting/ Change of the APN
3. Set configuration, parameter like sleep time for speed, harsh braking, rash turns, etc.
4. Emergency SMS Centre Number
5. Configuring the vehicle registration number
6. Configuring the frequency of data transmission in normal / Ignition state / OFF state sleep mode, Emergency state, etc.
7. Configuring the time duration for Emergency state
8. Capability to reset the device
9. Command to get the IMEI of the device

Configurable commands must involve the following features:

- SET: For setting the parameters.
- GET: For enquiring regarding the parameters such as mobile number, GSM strength, vehicle number and other important parameters.
- CLR: For clearing certain commands, alarms, alerts etc.

5.0 **CONSTRUCTION AND INSTALLATION**

(To be verified on component level and target vehicle level approval)

5.1 **Requirements on vehicle interface for VLT with Emergency Button**

Connector for Power

The requirements for interface shall be as below or as agreed between vehicle manufacturer and device manufacturer.

Standard connectors conforming to ISO 15170 shall be used at vehicle side. Connector requirements shall be as per Annexure – C, Clause 1.1 (Sl. No 1 - Low power systems 1)

However, Device/System side connector/s shall be pre-agreed with equipment manufacturer by

- Vehicle OEM in the case of OE fitment of the systems
- System supplier in case of retro fitment in aftermarket.

These requirements do not apply to integrated systems with vehicle where integration is done by vehicle manufacturer and /or System Integrator.

5.2 **Requirement of Emergency System**

Emergency button shall be one time press type. Separate release action from authorized server shall be required to bring back the emergency button to normal mode or clear emergency flag.

5.3 **Physical Mounting**

The VLT system shall be mounted in a suitable location such a way that it is not easily accessible /exposed to passengers.

This requirement shall not be applicable in case of combined systems VLT with HMI (Human Machine Interface) display in front of driver.

Test agency to verify this on vehicle level approval.

Emergency button(s) shall be fitted in such a way that every passenger including driver shall be able to access the Emergency button(s).

Passenger Car shall have 2 emergency buttons on each passenger row easily assessable by each of the passenger. There shall also be one dedicated emergency button for the driver.

Passenger Transport bus shall have emergency buttons at locations easily visible & assessable to all the passengers such as every 2 meters on both the sides on passenger seating area. For seats reserved for ladies there shall be a dedicated panic button for each row.

Test agency to verify this on vehicle level approval.

5.4 **Power Supply**

The vehicle tracking device will be installed on vehicles in which the power supply voltage from vehicle battery is widely varying (12V, 24V etc.) and also the power supply is not as stable as that in case of fixed locations, especially during engine start-up and braking when the voltage can fall to as low as 9V. Typically electronic devices are very sensitive to power surges and spikes, and equipment may fail if they do not receive stable power supply. The devices will need to have a resilient power supply unit that can withstand such fluctuations and the devices also need to have power backup so that they continue to function for some duration when the vehicle battery is not functional or is disconnected from the devices.

Vehicle power interface shall have

- One common ground linked to vehicle chassis
- One permanent power Supply (12/24V) connected to the vehicle battery
- One non-permanent power line (12/24V) connect to the battery after ignition

5.4.1 **Electrical Wiring**

The wiring harness used in the device shall be tested for flammability as per IS 2465.

6.0 **FUNCTIONAL, PERFORMANCE, DURABILITY, ENVIRONMENTAL AND PROTOCOL TESTS**

6.1 **Vehicle Level Functional Tests**

Following functionalities for each of the systems shall be demonstrated at the vehicle, in case system is provided by the vehicle OEM.

6.1.1 **Vehicle Location Tracking With Emergency Button**

6.1.1.1 Vehicle OEM shall only provide/ installed devices approved under component level testing.

6.1.1.2 System transmits PVT information to Backend Control Center (2 different IPs) at user configurable frequency (minimum 5 seconds) via GSM/GPRS.

6.1.1.3 System to communicate to control center on the occurrence of the alerts captured in Communication Protocol of Section 4.

6.1.2 **Emergency Request**

Emergency request function- When the emergency buttons (as applicable) placed anywhere in the vehicle is pressed by any passenger / crew, make sure that the emergency request message is send/received at the control center.

6.2 **Component Level Functional Tests**

Following functionalities for each of the systems shall be demonstrated. At the choice of the manufacturer, these functionalities can also be alternately demonstrated at the vehicle level and shall be deemed to be complied with at component level as well.

6.2.1 **Vehicle Location Tracking**

6.2.1.1 Standard connector provided for Power and other signals as per Annexure C

6.2.1.2 Configuration of device as per the standard format mentioned in Section 4.

Local configuration upload shall be verified

Configuration upload from control center shall be verified

6.2.1.3 Vehicle Location data transmission to Backend Control Center.

6.2.1.4 Backend Control Centre shall be able to check the version of firmware loaded on the system.

6.2.1.5 Update the firmware of the system from Backend Control Centre

6.3 **Device Level Functional, Performance & Durability Tests**

The tests to be performed for device level approvals are as listed below. These functionality check will be performed after each test as acceptance criteria –

Tested systems shall satisfy general functional requirements at all the specified ranges during the test and after the test.

Following to be checked after testing:

- i) Tracking functionality shall be checked via Backend Control Centre for the VLT system (Functional Test number 1 as per “Table 6A Functional Testing”.

6.3.1 **Functional Testing**

Functional Testing as described in the Table 6A below shall be done with the acceptance criteria in Table 6A after completion of all the Performance & Durability Tests as listed in Table 6B.

Table 6A: Functional Testing		
Sl. No	Test	Test Procedure
1	Tracking Functionality Test	<p>The test shall be conducted on VTL to determine the proper functioning of VLT with Emergency Button by testing its connectivity to Backend Control Centre (Government authorized server).</p> <p>Procedure: The VLT with Emergency Button shall be connected to vehicle battery to switch it on. The VLT with Emergency Button shall be tested for the connectivity to server and its capability to send two location messages</p>

2	Location Accuracy Test	<p>This test shall be conducted on VLT with Emergency Button.</p> <div data-bbox="815 315 1262 465" data-label="Diagram"> </div> <p>The receiver is placed into a cold start state – usually by a command sent to the receiver through a test connection – and then a fairly strong navigation signal simulating in L and/or S band is sent. The time it takes for the receiver to determine its first good location fix is recorded. Test is done many times (>15 times) over many conditions and the results are averaged.</p> <p>Acceptance Criteria: 2.5 m CEP or 6 m 2DRMS</p>
3	Acquisition Sensitivity Test	<p>This test shall be conducted on VLT with Emergency Button.</p> <p>Procedure: Set the simulator to output navigation signal simulating L and/or S band to a particular location with a very level so that the tracking is not possible. Gradually increase the signal level that allows the receiver to successfully perform a cold start TTFF within a specified time frame. The minimum signal level that allows acquisition is referred as to the acquisition sensitivity.</p> <p>Acceptance Criteria: The acquisition sensitivity shall be minimum (-) 148 dBm.</p>
4	Tracking Sensitivity Test	<p>This test shall be conducted on VLT.</p> <p>Procedure: The device under this test is locked on to the simulator's output frequency (navigation signal simulating L and/or S band) and the simulator power output is lowered until the lock is lost. Multiple repetition of the test with different satellite geometries ensures that an accurate average measure is recorded.</p> <p>Acceptance Criteria: The tracking sensitivity shall be equal to or better than (-) 165 dBm.</p>

5	Cold-Start Time to First Fix (TTFF) Test	<p>The device in this test is placed into a cold start state. The time it takes for the device to determine its first good location fix is recorded. The cold start test is performed several times and the results are averaged.</p> <p>Acceptance Criteria: The cold start TTFF shall be less than 40 seconds at Open Sky condition or (-) 130 dBm.</p>
6	Warm-Start Time to First Fix Test	<p>In this test the device is started in warm start mode and time taken by device to determine the first valid location fix is recorded. This is done several times and results are averaged.</p> <p>Acceptance Criteria: The warm start TTFF shall be less than 30 seconds at Open Sky condition or (-) 130 dBm.</p>
7	Hot-Start Time to First Fix Test	<p>In this test the device is started in Hot start mode and time taken by device to determine the first valid location fix is recorded. This test is performed several times and results are averaged.</p> <p>Acceptance Criteria: The hot start TTFF shall be less than 5 seconds.</p>
8	SIM Test	<p>This test is to check the suitability of the SIM and communication module. The test shall be conducted to determine the effectiveness and operation of the GPRS module with OTA network switching capabilities on demand as well as automatically in real-time. The test consist of two type of testing as below:</p> <ol style="list-style-type: none"> 1. The device would be tested to perform as per the protocol using an embedded SIM. 2. The GPRS module & SIM, shall support: <ul style="list-style-type: none"> ○ SMS, Data (GPRS, TCP/IP) and ○ Support multiple network OTA switching capabilities (On Demand as well as Automatic Switching on real-time basis) <p>Acceptance Criteria: In the testing, vendors has to demonstrate the embedded SIM based tracking and multiple network OTA switching capabilities (On Demand as well as Automatic Switching on real-time basis) for effective network management and transmission.</p>

9	Interference Test	<p>Interference testing is a type of test, in which Cold Start/Hot Start test are performed with device exposed to interfering signals and the performance as recorded. In this test, the GPS receiver is turned on and allowed to achieve a location fix. The jamming signal is then added to the GPS signal at a level that is detectable to the GPS receiver. The jamming signal power level is increased in 1 dB increments until the first degradation of the GPS receiver is noticed. This is typically a dropped satellite. The jamming signal power level is again slowly increased until the GPS receiver loses its 3D navigation fix.</p> <p>Acceptance Criteria: The Interference shall not result in any degradation of the Cold Start/Hot Start TTF times. In addition, it shall not result in any degradation of the absolute location accuracy required and the same shall be 2.5 m CEP or 6 m 2DRMS.</p>
10	Multipath Test	<p>This test is a simulated frequency test conducted to determine the effect of multipath signals. The signal from a single satellite is simulated to arrive at the device via two or more paths. One path is typically a direct path, and other paths are typically a reflection of the same signal from building or structure. Multipath testing is a kind of a meta-test in that some of the above tests are done with the addition of multi-path simulation of one or more satellites by the GPS signal simulator.</p> <p>Acceptance Criteria: The multipath shall not result in any degradation of the Cold Start/Hot Start TTF times. In addition, it should not result in any degradation of the absolute location accuracy required and the same shall be 2.5 m CEP or 6 m 2DRMS.</p>

6.3.2 **Performance & Durability Test**

The Performance & Durability Test is listed in Table 6B.

<p align="center">Table 6B: Performance & Durability Test</p>		
Sl. No	Test	Test Procedure
1	Shock Test	Shock test is performed to provide a degree of confidence that the device can physically and functionally withstand the relatively

		<p>infrequent, non-repetitive shocks encountered in transportation environments. This test provides an assessment of the effect of the shocks on the performance of the device. The test shall be performed as per IS 9000-part 7 – 2006. Severity Level = 15g, Impact duration = 11ms, Impact Type = Half sine, Total number of impact = 9 (3 on each axis)</p> <p>Acceptance Criteria: Device after the shock test shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
2	Vibration Test	<p>This test is performed to check that the device the device can physically and functionally withstand the vibration exposures in the life cycle typically encountered in a vehicular environment. The test shall be performed as per IS 9000-part 8 – 1981. The test specimen mounted on a suitable support shall be rigidly fixed on a suitable vibrating machine constructed to produce simple harmonic function (total amplitude of 1.5 mm) and shall be subjected to vibration through a frequency range of 10-55-10 Hz in a sweep period of 1 min with continuously varying frequencies. The vibration shall be applied for not less than 1 h in the directions of each of the 3 major axes of the light.</p> <p>Acceptance Criteria: During and after the test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
3	Ingress Protection (IP)	<p>The vehicle tracking devices must be able to work in dusty environment that are typically encountered by the public transport vehicles where these would be installed. IP rating (IS/IEC 60529 - 2001) is used for specifying the environmental protection characteristics of the tracking device. The device will be tested for dust and water ingress according to IP 65 rating.</p> <p>Acceptance Criteria: The device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>

4	EMI /EMC	<p>The Electromagnetic Interference (EMI) and Electromagnetic Compatibility (EMC) tests are performed to assess whether the device performs its intended functions in the electromagnetic environment to which it would be exposed. Further, the device shall not generate electromagnetic disturbances that may influence other equipment in the vicinity.</p> <p>Acceptance Criteria: The device shall meet the EMI/EMC requirements as per AIS 004 (Part 3).</p>
5	Battery Backup Test	<p>Battery backup is the amount of time that the device battery can support sending the data without being connected to the power source. This test will be performed by disconnecting the input charging voltage to the device. On disconnecting the external supply, battery would use its charge capacity to send data through GPRS. Time duration between external power disconnect to the last data packet time denotes the battery backup time.</p> <p>Acceptance Criteria: Device shall be able to work in active mode for a period of 4 hours or more at the polling/ transmission rate of 60 sec</p>
6	Reverse Polarity Protection without Fuse	<p>The device to be tested shall be connected to a reversed voltage of 14 V for 12 V systems and 27 V for 24 V systems for 2 min after connecting the system to the suitable circuit.</p> <p>Acceptance Criteria: After test; the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A</p>
7	Wiring Harness - Flammability Test	<p>Flammability Test: The wiring harness used in the device shall be tested for flammability as per IS 2465.</p>
8	Wiring Harness - Electrical Properties	<p>As per AIS 028 or DIN72551 or ISO 6722</p>
9	Free Fall	<p>IS 9000 (Part VII/Sec 4) Free fall at 500 mm.</p> <p>Acceptance Criteria: After test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table A</p>

10	<p>Performance Parametric Test (Nine points, tri temperature/tri voltage)</p>	<p>During testing, VLT with Emergency button shall be kept inside test chamber in power ON condition.</p> <p>(System shall be stabilized for minimum 5 min at each condition.</p> <p>At each test point the system will be powered on and shut down 5 times with a duration of 1 min ON and 1 min OFF time)</p> <p>Following are the various voltages & temperatures</p> <table border="1" data-bbox="820 683 1313 1361"> <thead> <tr> <th>24 V System</th> <th>12 V System</th> </tr> </thead> <tbody> <tr> <td>18V, -25°C</td> <td>9V, -25°C</td> </tr> <tr> <td>18V, +80°C</td> <td>9V, +80°C</td> </tr> <tr> <td>18V, Room Temperature</td> <td>9V, Room Temperature</td> </tr> <tr> <td>27V, -25°C</td> <td>13.5 V, -25°C</td> </tr> <tr> <td>27V, +80°C</td> <td>13.5V, +80°C</td> </tr> <tr> <td>27V, Room Temperature</td> <td>13.5 V, Room Temperature</td> </tr> <tr> <td>32V, -25°C</td> <td>16V, -25°C</td> </tr> <tr> <td>32V, +80°C</td> <td>16V, +80°C</td> </tr> <tr> <td>32V, Room Temperature</td> <td>16V, Room Temperature</td> </tr> </tbody> </table> <p>Acceptance Criteria: The device shall be required to meet the provisions of Functional Test Number 1 as listed in Table A for each value of the temperature and voltage</p>	24 V System	12 V System	18V, -25°C	9V, -25°C	18V, +80°C	9V, +80°C	18V, Room Temperature	9V, Room Temperature	27V, -25°C	13.5 V, -25°C	27V, +80°C	13.5V, +80°C	27V, Room Temperature	13.5 V, Room Temperature	32V, -25°C	16V, -25°C	32V, +80°C	16V, +80°C	32V, Room Temperature	16V, Room Temperature
24 V System	12 V System																					
18V, -25°C	9V, -25°C																					
18V, +80°C	9V, +80°C																					
18V, Room Temperature	9V, Room Temperature																					
27V, -25°C	13.5 V, -25°C																					
27V, +80°C	13.5V, +80°C																					
27V, Room Temperature	13.5 V, Room Temperature																					
32V, -25°C	16V, -25°C																					
32V, +80°C	16V, +80°C																					
32V, Room Temperature	16V, Room Temperature																					
11	<p>Insulation Resistance Test</p>	<p>Test shall be conducted as per ISO 16750-2:2010 after damp heat test mentioned in point 3 of the Section 6.4. System/components shall remain 0.5 h at RT after the damp heat test.</p> <p>Test shall be conducted With a voltage of 500 V DC. Acceptance Criteria: Insulation Resistance shall be > 1 MΩ.</p> <p>No arcing or puncturing of insulation allowed shall be observed</p>																				

12	Load Dump Test Pulse 5a	<p>VLT shall be tested for this.</p> <p>For 12 V System: A Voltage spike of 65V, 4 Ohms 200ms pulse-5a as per standard ISO 7637-2: 2004</p> <p>For 24 V System: A Voltage spike of 123V, 8 Ohms 200ms pulse-5a as per standard ISO 7637-2: 2004.</p> <p>Acceptance Criteria: Device shall meet functional class A as per ISO 7637-2: 2004. After test, the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
----	----------------------------	--

6.3.3 Device Level Environmental Tests

The environmental tests to be performed for device level approvals are as listed in Table 6C.

Following to be checked after testing:

- i) Tracking functionality shall be checked via Backend Control Centre for the VLT with Emergency Button.

Table 6C: Device Level Environmental Test		
Sl. No	Test	Test Procedure
1	Dry Heat / High Temperature Test	<p>The high temperature test is used to evaluate effects of high temperature conditions on safety, integrity, and performance of the device. The test shall be carried out in accordance with Indian Standard IS: 9000 (Part 3/Sec 5) the device shall be subjected to temperature of $70 \pm 2^{\circ}\text{C}$ for 16 h in high temperature. Test with device in working condition. The recovery period shall be 2 h.</p> <p>Acceptance Criteria: Device during and after the high temperature test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
2	Cold Test	<p>The test shall be carried out in accordance with IS 9000 (Part 2/Sec 4 - 1977). The device under test shall be subjected to temperature of $-10 \pm 2^{\circ}\text{C}$ for 2 h with device in working condition. The recovery period shall be 2 h.</p> <p>Acceptance Criteria: Device during and</p>

		after the cold test, the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.
3	Damp Heat Test	<p>The device under test shall be tested according to IS 9000 (Part 5/Sec 2 - 1981). The test is carried out at +25° to +55° C, Humidity 95%. Six cycles (each test cycle of 24 h) shall be run with device in off condition. Functional test shall be carried out with power in 'On condition' at start of 2nd, 4th and 6th cycle.</p> <p>Acceptance Criteria: Device during and after the test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
4	Temperature Shock	<p>Temperature shock test is carried out to determine if the device can withstand sudden changes in the temperature of the surrounding atmosphere without experiencing physical damage or deterioration in performance. The device shall be tested as per IS 9000 (Part 14/Sec 2) – 1978. Exposure time would be 3 hours/cycle and number of cycles would be two.</p> <p>Acceptance Criteria: Device after the test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
5	High Temperature Test	<p>The high temperature test is used to evaluate effects of high temperature conditions on safety, integrity, and performance of the device. The test shall be carried out in accordance with Indian Standard IS: 9000 (Part 3/Sec 5) the device shall be subjected to temperature of $70 \pm 2^{\circ}\text{C}$ for 16 h in high temperature. Test with device in working condition. The recovery period shall be 2 h.</p> <p>Acceptance Criteria: Device during and after the high temperature test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>
6	Salt Spray Test	<p>The salt spray test is conducted to check corrosion resistance of device. The device shall be tested according to Clause 4.8 of IS 10250 for 96 h.</p> <p>Acceptance Criteria: The device shall be</p>

		required to meet the provisions of Functional Test Number 1 as listed in Table 6A.
7	High Voltage Test	<p>The test is conducted to ensure service life requirements & functionality. The device under test shall be operated for 60 minutes at 18 V for 12 V systems & 36 V for 24 V systems. This test is as per ISO 16750-2:2010</p> <p>Acceptance Criteria: Device during and after the test the device shall be required to meet the provisions of Functional Test Number 1 as listed in Table 6A.</p>

6.3.4 **Protocol Testing**

This set of testing needs to be done for all cases namely vehicle level testing and component (Device) level testing.

Protocol is a set of rules to be followed by the device while sending data to the Backend Control Centre. The protocol comprises data update rate, number of fields, start character, end character, alert type etc. Protocol testing involves checking the compliance of data sets received by the Backend Control Centre against the protocol both with respect to the data fields as well the format. It is expected that the data coming to a central server shall be exactly as required under the protocol. Table below (Table 6D) mentions the validation process for the protocol communication.

Table 6D:	
Protocol Testing Parameters	
Field Description Validation Process	
Field	Description
Start Character	\$
Header	The header of the packet/ identifier
Vendor ID	Vendor identification header
Firmware Version	Version details of the Firmware used in EX.1.0.0
Packet Type	Specify the packet type – NR = Normal EA = Emergency Alert TA = Tamper Alert HP = Health Packet IN = Ignition On IF = Ignition Off BD = Vehicle Battery Disconnect

	BR = Vehicle Battery Reconnect BL = Internal Battery Low
Packet Status	L=Live or H= History
IMEI	Identified of the sending unit. 15 digit standard unique IMEI no.
Vehicle Reg. No	Mapped vehicle registration number
GPS Fix	1 = GPS fix OR 0 = GPS invalid
Date	Date value as per GPS date time (DDMMYYYY)
Time	Time value as per GPS date time in UTC format (hhmmss)
Latitude	Latitude value in decimal degrees (with minimum 6 decimal places)
Latitude Dir.	Latitude Direction. Example N=North, S= South
Longitude	Longitude value in decimal degrees (with minimum 6 decimal places)
Longitude Dir.	Longitude Direction. Example E=East, W= West
Speed	Speed of Vehicle as Calculated by GPS module in VLT.(in km/hr)
Heading	Course over ground in degrees
No. of Satellites	Number of satellites available for fix
Altitude	Altitude of the device in meters
PDOP	Positional dilution of precision
HDOP	Horizontal dilution of precision
Network Operator Name	Name of Network Operator.
Ignition	1= Ign On , 0 = Ign Off
Main Power Status	0 = Vehicle Battery Disconnected 1= Vehicle Battery Reconnected
Main Input Voltage	Indicator showing source voltage in Volts.
Internal Battery Voltage	Indicator for Level of battery charge remaining
Emergency Status	1= On , 0 = Off
Tamper Alert (Optional)	C = Cover Closed , O = Cover Open
GSM Signal Strength	Value Ranging from 0 – 31

MCC	Mobile Country Code
MNC	Mobile Network Code
LAC	Location Area Code
Cell ID	GSM Cell ID
NMR (neighbouring Cell ID)	Neighbouring 4 cell ID along with their LAC and signal strength
Digital Input Status	4 external digital input status (Status of Input 1 to Input 3 (0=Off; 1=On))
Digital Output Status	2 external digital output status (0=Off; 1=On)
Frame Number	Sequence Number of the messages (000001 to 999999)
Checksum	Insures No error in transmission (optional)
End Character	Indicated End of the frame

The following test would be performed along with the protocol testing of the device:

a) Memory Storage

The device shall support 40000 or more positional logs/packets. This is a functional test and the device will be simulated to be in non – GPRS coverage area and the logs will be maintained. The capacity of logging will be checked by monitoring the logs on the device.

b) Messages & Alerts from Devices

Table below (Table 6E) contains the listing of alerts that need to come from the tracking devices. These alerts are applicable for both live packets as well as the history packets.

Alert ID	Message & Alerts	Remarks
1.	Location Update	Default message coming from each device
2.	Location Update (history)	Would be sent, if GPRS is not available at the time of sending the message
3.	Alert – Disconnect from main battery	If device is disconnected from vehicle battery and running on its internal battery
4.	Alert – Low battery	If device internal battery has fallen below a defined threshold
5.	Alert – Low battery removed	Indicates that device internal battery is charged again

6.	Alert – Connect back to main battery	Indicates that device is connected back to main battery
7.	Alert – Ignition ON	Indicates that Vehicle's Ignition is switched ON
8.	Alert – Ignition OFF	Indicates that Vehicle's Ignition is switched OFF
9.	Alert – GPS box opened (Optional)	Message would be generated indicating GPS box opened
10.	Alert – Emergency state ON*	When any of the emergency button is pressed
11.	Alert – emergency State OFF	Emergency state of switch will be cancelled by backend server, when emergency state of vehicle is removed
12.	Alert Over the air parameter change	When any parameter is changed over the air. Shall include the name of parameter changed and source of command
13.	Harsh Braking	Alert indicating for harsh braking.
14.	Harsh Acceleration	Alert indicating for harsh acceleration.
15.	Rash Turning	Alert indicating for Rash turning.

* In case of Emergency Alert ON system, the alert message should go in the below format as set out in Table 6F. This emergency alert message shall be sent to 2 different IPs; i.e. the device shall support minimum 2 IPs simultaneously.

Table 6F:


Message Format

Attribute	Value / Description	Size
Packet Header	EPB, The unique identifier for all messages from VLT	Character, 3 bytes
Message Type	Message Types supported. Emergency Message (EMR) or Stop Message (SEM)	Character, 2 bytes
Device ID Vehicle ID	Unique ID of the Vehicle (IMEI Number)	Character,15 bytes
Packet Type	NM – Normal Packet, SP – Stored Packet	Character, 2 bytes
Date	Date and time of the location	Character,14 bytes


	obtained from the location data in DDMMYYYY hhmss format	
GPS Validity	A – Valid, V – Invalid	Character, 1 byte
Latitude	Latitude in decimal degrees - dd.mmmmmm format	Double, 12 bytes
Latitude Direction	N – North, S – South	Character, 1 byte
Longitude	Longitude in decimal degrees - dd.mmmmmm format	Double, 12 bytes
Longitude Direction	E – East W – West	Character, 1 byte
Altitude	Altitude in meters (above sea level)	Double, 12 bytes
Speed	Speed of Vehicle as Calculated by GPS module in VLT. (in km/hrs.)	Float, 6 bytes
Distance	Distance calculated from previous GPS data	Float, 6 bytes
Provider	G - Fine GPS N – Coarse GPS or data from the network	Character, 1 byte
Vehicle RegnNo	Registration Number of the Vehicle	Character, 16 bytes
Reply Number	The mobile number to which Test response need to be sent. (Emergency Mobile No. as specified by MHA/MoRTH/States.)	0
CRC	The 32 bit checksum of all the characters from the header up to the CRC field	8 bytes

7.0 DEVICE TO BACKEND COMMUNICATION MECHANISM

The VLT device would transmit data to the Backend Control Centre using GPRS wireless connectivity (with SMS fall back) as per the protocol provided in respective sections (Sub-section 6.3.4). The data from the devices would travel over the wireless telecom service provider network and finally get delivered at the Backend Control Centre. Since the permit holders/Device suppliers would require to have a valid communication plan on SIM cards on the devices and would avail services from multiple telecom service providers, the data would be transmitted to the Backend Control Centre using the networks of multiple telecom service providers.

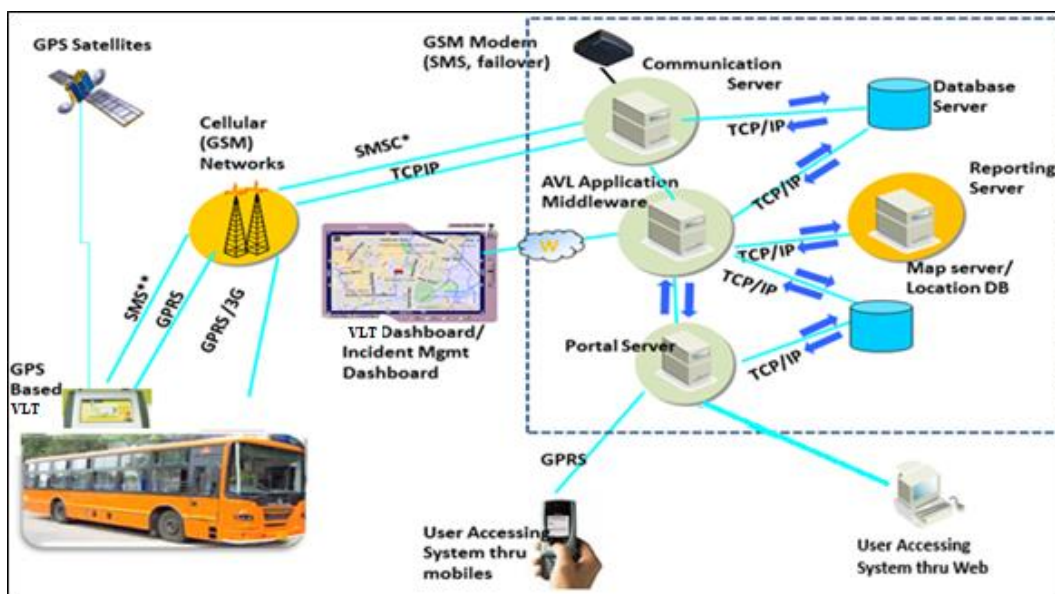

Indicative Architecture

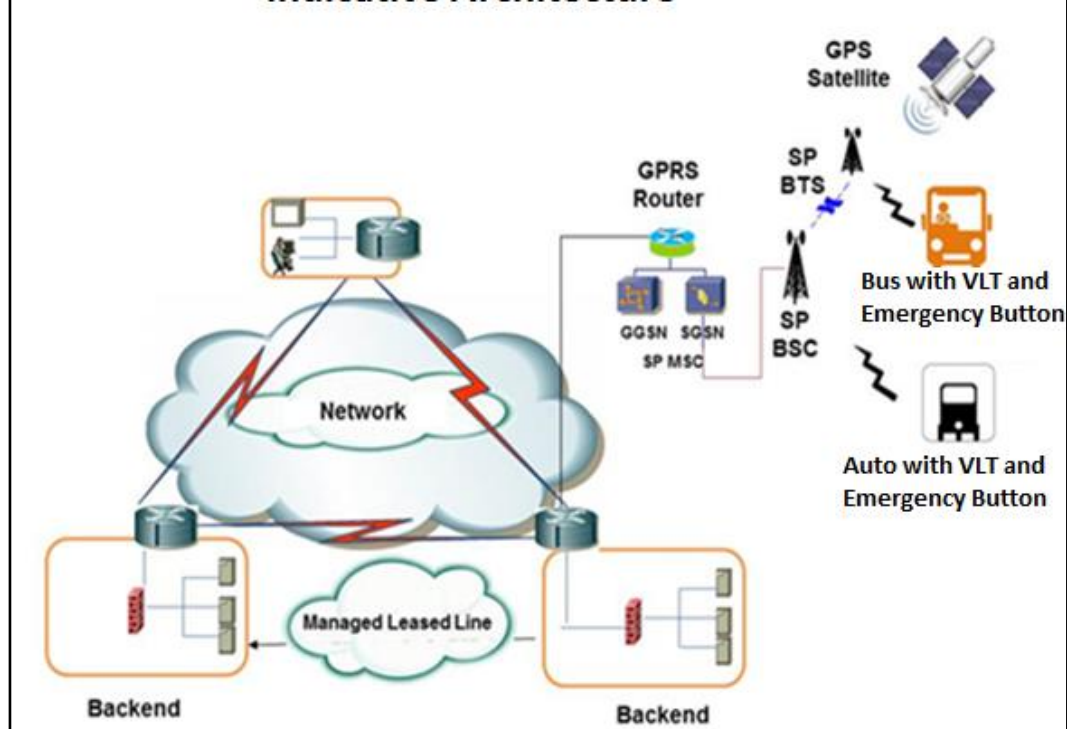

A suitable control mechanism would be established for the data transfer from VLT to Backend Control Centre, as only the authorized devices should be able to transfer data to the Backend Control Centre and a mechanism for authenticating the devices/SIMs shall also be put into place.

The following mandatory provisions will have to be made in the Backend Control Centre:

1. Registration and activation of the device(s) fitted on the vehicle, including the details of vehicle registration number, engine number, chassis number, vehicle make and model, device make and model, and telecom service provider's name.
2. Re-registration/re-activation of the device(s) fitted on the vehicle in case of any change in device or telecom service provider, etc.
3. Regular health check of the device(s) fitted on the vehicle, as per the parameters and frequency defined in Sub-section 3.1.4.
4. Administration/configuration of devices for any changes in the parameters as decided by the respective state from time to time.
5. Notification of alerts in case of press of an Alert Button fitted on the vehicle, in the protocol defined in Section 4.
6. Notification of alerts in case of defined deviations by vehicle such as over-speeding, deviation from defined route/geographic area, time of operation, etc.
7. Location tracking of the vehicle including real-time as well as history tracking for up to last 90 days.
8. Notification to the permit-holder through SMS in case any device(s) stops functioning/sending data to the Backend Control Centre.
9. Reports of the vehicles with devices not working/sending data beyond defined number of days (1 day, 3 days, 7 days and 30 days).
10. Ensure that the security and privacy of the data is maintained in accordance with applicable laws/guidelines of various government authorities.

In addition to the above mandatory provisions, the Backend Control Centre can provide any other optional features.

The mechanism to set up the Backend Control Centre shall be decided by the respective states. The states can chose any of the following options for setting up the Backend Control Centre:

1. States can set up their own dedicated Backend Control Centre, meeting the above listed mandatory provisions and any other optional features as they may decide
2. States can allow telecom service providers to offer Backend Control Centre as a Value Added Service (VAS) to the permit holders, meeting the above listed mandatory provisions and any other optional features as they may decide. In this case, the telecom service providers shall provide access to the Backend Control Centre to government officials, as decided by the respective state.

**ANNEXURE A:
INFORMATION TO BE SUBMITTED FOR TYPE APPROVAL**

1.0 VLT SYSTEM DETAILS

- a. Make
- b. Type
- c. Model No.
- d. Part No.
- e. Installation layout: Attach drawing showing location in vehicle.

2.0 VEHICLE LOCATION TRACKING AND EMERGENCY BUTTONS

- a. Make
- b. Model No.
- c. Part No.
- d. Connector used
- e. Connector used for antennas
 - e.1. main GSM antenna
 - e.2. GPS antenna
 - e.3. WLAN antenna

3.0 SYSTEM SOFTWARE

- a. Make
- b. Version
- c. Operating System Details with Version

4.0 COMMUNICATION PROTOCOL USED

- a. Vehicle to Center
 - VLT to Control Center
 - Command Set for Configurations

5.0 DESCRIPTION OF DEVICE

6.0 DRAWINGS

6.1 Device/System Drawing.

6.2 Vehicle installation Drawing.

7.0 INSTRUCTIONS MANUAL

ANNEXURE B:

CRITERIA FOR EXTENSION OF TYPE APPROVAL

B1.0 In case of following changes, Functional, Performance, Durability and Environmental Tests which are necessary for establishing compliance are listed below

	Changes in System	Tests to be conducted
B1.1	Change in Make, Model, Type, accompanied with or without a Part No of Vehicle Location Tracking (VLT) and Vehicle Health Monitoring.	Applicable tests as per Section 6 and Functional verification at system integration level or component level as applicable.
B1.2	Change in onboard layout of ITS component or complete system	Verification at system integration level along with target vehicle
B1.3	Change in software of ITS System	Functional verification at system integration level.
B1.4	Change in wiring harness and connectors	Connector requirements specified in this standard.

ANNEXURE C:

PHYSICAL INTERFACES (CONNECTORS) FOR POWER AND I/Os

The below section is for new vehicles and not for the retro-fitment of ITS systems on in-use vehicles.

Device/System side connector/s shall be as per the equipment manufacturer by in case of retro fitment in aftermarket.

Provisions for Power connectors and Power supply to be made by Manufacturers in case of OE fitment & Dealer / Permit holder in case of retro fitment of systems outside vehicle manufacturer facility.

These requirements do not apply to integrated systems with vehicle where integration is done by vehicle manufacturer and /or System Integrator.

1.0 Vehicle Side Connectors

The vehicles shall be equipped with connectors with appropriate fuse protection for interfacing systems implements the functions

Power for physical systems are supplied by vehicle battery which supplies power to all electrical system in the vehicle.

When the engine is running, the vehicle battery is in charge and the systems shall consume normal power needs. But when the engine is turned off, the power consumption by systems shall be limited by means of sleep modes or auto shut off.

Considering the power requirements for equipment packages, the systems are grouped as

ITS System Classification	Max Power	Typical Systems / Packages
Low Power Systems	Up to 120 W	VLT with Emergency Button

The power interface shall have

- One common GROUND linked to vehicle chassis - GND
- One permanent power line (12/24V) linked to the battery after Manual Switch – B+
- One non-permanent power line (12/24V) linked to the battery after Main Switch – SW+

1.1 Minimum Connector Requirements

The minimum connector requirements are formulated as following.

Sl. No.	Recommended Electrical Provisions	Max Power	Applicable ITS Systems	Minimum Requirement	Recommended Connector
1.	Low Power	Up to	Telematics	B+, SW+,	OEM to protect

	System 1 (Mandatory Provision)	120 W	Device/VLT System with Emergency Button	GND	ISO 15170-B1- 3.1-Sn/K1 Socket (Female) Connector
--	--------------------------------------	-------	--	-----	---

The OEM may provide optional auxiliary connectors of their choice for meeting other functional requirements.

1.2 Connector labeling in Wiring Harness:

Vehicle side wiring shall have the following labeling for the connectors

Recommended Electrical Provisions	Labeling Requirement
Low Power System 1 (Mandatory Provision)	ITS 120 W
Low Power System 2 (Mandatory Provision)	ITS 120 W
High Power System 1 (Mandatory Provision)	ITS 360 W
CAN Interface (OBDII CAN) (Mandatory Provision)	ITS CAN


1.3 Connector Cavity/PIN Assignment

Power Connector: ISO 15170-B1-3.1-Sn/K1, ISO 15170-B2-3.1-Sn/K1


Pin 1	B+
Pin 2	SW+
Pin 3	GND

CAN Connector: ISO 15170-B1-4.1-Sn/K1

Pin 1	CAN High
Pin 2	CAN Low
Pin 3	Option CAN Ground
Pin 4	Not used



a) Code 1 — Colour: black (BK)



b) Code 2 — Colour: grey (GY)

2.0 Device/System connectors

Device/System side connector/s shall be pre-agreed with equipment manufacturer by

1. Vehicle OEM in the case of OE fitment of the systems
2. Permit holder or Dealer in case of retro fitment of systems outside vehicle manufacturer facility

ANNEXURE D:
(See Introduction)
COMPOSITION OF AISC PANEL *

Name	Organization
Convener	
Mr. Rakesh Jain	Delhi Integrated Multi-Modal Transit System Ltd. (DIMTS)
Members	Representing
Mr. Prashant Tiwari /Shri Alok Sethi	Delhi Integrated Multi-Modal Transit System Ltd. (DIMTS)
Mr. A. D. Deshpande/ Mr. M.M. Desai / Mr. K. B. Patil	The Automotive Research Association of India (ARAI)
Director / Mr. Samir Sattigeri /Shri M. M. Pathak	Central Institute of Road Transport (CIRT)
Mr. GRM Rao	Vehicle Research & Dev. Estt. (VRDE)
Dr. Madhusudan Joshi,	International Centre for Automotive Technology (ICAT)
Director	Indian Institute of Petroleum (IIP)
Director	Central Farm Machinery Training and Testing Institute (CFMTTI)
Dr. N. Karuppaiah	NATRIP
Mr. K. K. Gandhi	SIAM
Mr. S. Ravishankar/ Mr. D. Balakrishnan	Ashok Leyland Technical Centre (SIAM)
Mr. Girish Kodolikor	Force Motors Ltd. (SIAM)
Mr. Sanjay Tank	Mahindra and Mahindra Ltd. (SIAM)
Mr. Shrikant V. Joshi / Mr. P S Gowrishankar, / Mr. Sharad S. Bhole	Tata Motors Ltd. (SIAM)
Mr. Suchindran M	Toyota Kirloskar Motor Pvt. Ltd. (SIAM)
Mr. Jitendra Malhotra/ Mr. Sumit Sharma	Maruti Suzuki India Ltd.(SIAM)
Mr. S Ramiah	TVS Motor Company Ltd. (SIAM)
Mr. Arun Sivasubrahmaniyan	Hero Motocorp Ltd. (SIAM)
Mr. R. Narasimhan	Bajaj Auto Ltd. (SIAM)
Mr. Uday Harite	ACMA

Mr. N. K. Sharma	Bureau of Indian Standards (BIS)
Mr. Rahul Jain	Castmaster Mobitec India Pvt Ltd.
Mr. Jayant Wagh	KPIT Cummins Infosystems Ltd

* At the time of approval of this Automotive Industry Standard (AIS)

**ANNEXURE E
(See Introduction)**

**COMMITTEE COMPOSITION *
Automotive Industry Standards Committee**

Chairperson	
Mrs. Rashmi Urdhwareshe	Director The Automotive Research Association of India, Pune
Members	Representing
Shri Priyank Bharti	Ministry of Road Transport and Highways (Dept. of Road Transport and Highways), New Delhi
Representative from	Ministry of Heavy Industries and Public Enterprises (Department of Heavy Industry), New Delhi
Shri S. M. Ahuja	Office of the Development Commissioner, MSME, Ministry of Micro, Small and Medium Enterprises, New Delhi
Shri Shrikant R. Marathe	Former Chairman, AISC
Shri R.R. Singh	Bureau of Indian Standards, New Delhi
Director	Central Institute of Road Transport, Pune
Director	Indian Institute of Petroleum, Dehra Dun
Director	Vehicles Research and Development Establishment, Ahmednagar
Representatives from	Society of Indian Automobile Manufacturers
Shri T. R. Kesavan	Tractor Manufacturers Association, New Delhi
Shri Uday Harite	Automotive Components Manufacturers Association of India, New Delhi

Member Secretary

Shri Vikram Tandon

Dy. General Manager

The Automotive Research Association of India, Pune

* At the time of approval of this Automotive Industry Standard (AIS)